

### BOAT SPECIFICATIONS Eelex 8000



### **Eelex 8000**

Our flagship model is an 8 meter, highperformance center-console boat with an award winning Scandinavian design that naturally blends in with nature.

Every part of the Eelex 8000 is engineered from the ground up to take maximum advantage of the powerful all-electric drivetrain and other on-board cloud-connected systems.

Its integrated aluminum rails offer different interior modules, such as a sofa and table, that can be converted into a sunbed.

The Eelex 8000 is built for high performance with a 170 kW motor and a 126 kWh battery capacity that ranges up to 100 nautical miles at lower speeds.








# % X SHORE







### **ENTERTAINMENT**

Music streaming in premium sound speakers.

Charge all your devices with USB-C and USB-A in the center console.

#### **APP**

Much of the technology is connected to and handled by the X Shore app which also functions as a remote key. See the status of your boat at all times.

### Ease of use

Always-on location, error and performance tracking. Always visible range & battery-level indication.

Low-power wireless network for safety and security features.

Remote maintenance, customization and software updates. Onboard systems will protect batteries and motor from reaching any critical levels.






## **Specifications**

**%** X SHORE


- 100% electric
- Modulare interior
- 100 NM range at lower speed

### **EELEX 8000**

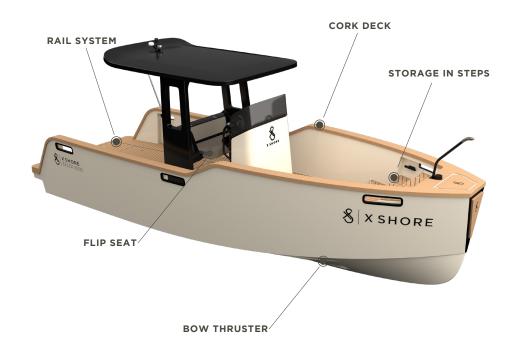

**CE-CERTIFICATION DESIGN CATEGORY C** 

(RECREATIONAL CRAFT DIRECTIVE 2013/53/EU)

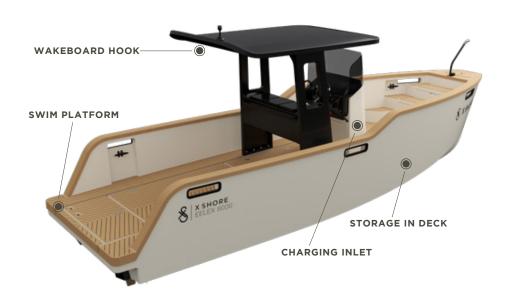

Price Top	Starts at €249,000 (excl. VAT)
Length	8 m / 26 ft
Beam	2.6 m / 8.4 ft
Depth	0.7 m / 2.4 ft
Height from WL	2.8 m / 9.2 ft
Weight	2.6 Ton / 5730 lbs
Electrical Motor	170 kW
Top Speed	30 Knots
Cruising Speed	20 Knots
Battery Capacity	126 kWh
Range	100 NM at lower speeds
Normal Charging	20-80% 3.5 hours (22 kW)
Fast Charging	20-80% 1 hour (75 kW)
Display	24 inch touch screen
Available Colors	



Juice Booster 2, smallest and safest mobile 22 kW charging station.

Waterproof, highly resistant, with working temperature range from -25°C to +45°C.

#### **CHARGING 20-80%**

3-PHASE 32A: 3.5H

3-PHASE 16A: 6H

1-PHASE 16A: 18.5H

### CHARGING 0-100%

3-PHASE 32A: 6.5H

3-PHASE 16A: 12.5H

1-PHASE 16A: 38H























PLEASE CONTACT US FOR MORE DETAILS INFO@XSHORE.COM +46 8 425 049 00